

**Gardner
Denver**

Nitrogen Gas Generators

Innovative Compressed Air Treatment
GDN2 Series





Obtaining or maintaining a **ready supply** of nitrogen gas can be problematic and expensive

Typical gas supply methods include high pressure cylinders, liquid mini tanks or bulk storage vessels.

However, each of these options introduce a range of problems that need to be solved. Being able to take control of nitrogen supplies as opposed to having to rely on third party can reduce operational costs significantly.

Continuous supply, ultimate reliability, competitive advantage

When you switch to gas generation with Gardner Denver, you can expect payback within six to 24 months, depending on your existing arrangements and consumption.



Lowest total lifetime cost

With unique design and advanced Energy Saving Technology at its core, our market leading on-site generator requires less compressed air to generate more nitrogen than other solutions. This translates into reduced energy consumption. Coupled with Substantially lower servicing costs, reduced Downtime and a longer working life, it adds up to the most cost-efficient nitrogen supply available; Significantly more affordable than traditional sources, and delivering huge savings over the lifetime of the generator.



On-site nitrogen generation made easy

Using high quality compressed air to supply the nitrogen generators, ensures long and trouble-free service and guarantees optimum performance. Gardner Denver compressors and pre-treatment packages including dryers and filters guarantee the highest quality air supply for nitrogen generation. Nitrogen gas can even be produced from spare capacity in your existing compressed air system with a minimum of additional floor space.

Lower cost maintenance, very long working life

The Carbon Molecular Sieve filtration delivers nitrogen more efficiently, leading to a very long working life – and major savings on maintenance and replacements.

Five year warranty

Free through Gardner Denver extended warranty, offering the assurance of no unexpected maintenance costs.



Industry compliance

Food and pharmaceutical safe, in line with European statute and the USA Food & Drugs Administration (FDA Article 21).

Energy Saving Technology

Matches compressed air flow to the nitrogen outlet flow and purity, reducing compressed air use, and saving energy and money.

Expandable

Add extra capacity as the application requirement grows.



Quality control

- Mass Flow Controller – ensuring correct set pressure and flow.
- Integral Oxygen Analyser – constantly measuring gas purity.
- Off-Gas By-Pass – automatically vents off out-of-specification gas.
- Inlet and outlet pressure regulation – preventing damage to the generator or application.
- Electronic control system – 100% management of all critical generator functions.



The technology behind the **benefits**

A number of significant advantages are offered by Gardner Denver on site nitrogen generators over delivered gas options, as well as traditional generator designs.

Highest efficiency, highest output nitrogen gas generator

Using less compressed air, Gardner Denver generators produce nitrogen at the lowest unit cost. Through extensive research and design, flow modelling technology, materials and controls system, Gardner Denver can provide the highest efficiency nitrogen generator.

Carbon Molecular Sieve (CMS)

Utilising the most robust, highest efficiency CMS - is one of the main reasons behind the major performance benefits such as more gas for less compressed air, reduced energy consumption; a very long working life and a more compact unit.

PSA technology


utilising Carbon Molecular Sieve
- designed for over 10 year's operational life.



Modular design for expandability, and compact footprint for maximum versatility and optimum use of factory space.

Easy-to-use control panel

plus mass flow controller and economy stand-by mode.

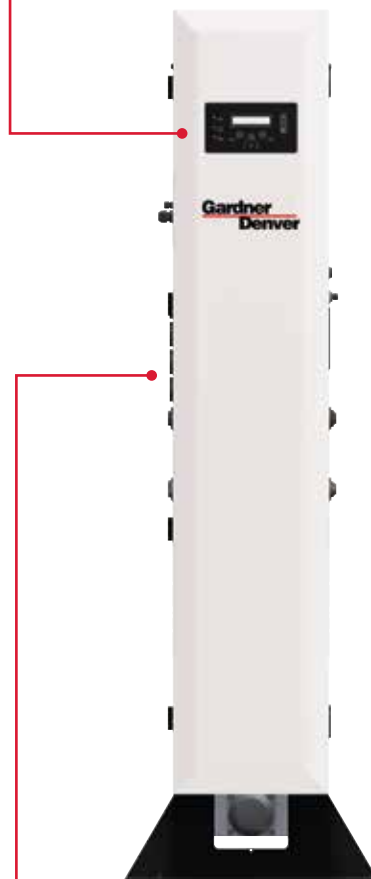

Unique Energy Saving Technology:

Exactly matches compressed air flow with nitrogen gas outlet flow and purity, for lowest energy consumption.

Industry compliance, food and pharmaceutical safe

Produces pharmaceutical and food grade nitrogen gas in accordance with European statute.

Manufactured from materials that are safe for gas contact with pharmaceutical and food products, in line with the USA Food & Drugs Administration Article 21 (FDA Article 21).

Unique Energy Saving Technology (EST)

Dramatically reduces compressed air consumption and energy cost, by ensuring that the inlet compressed air flow is always exactly matched to the nitrogen gas outlet flow and purity.

Expandable

You can be specified your system for your current requirement, and simply enlarge with additional generators - as and when demand increases. And with 100% back up provided by a single extra generator, there are extra savings on duplicating the complete set up.

Remote monitoring

With 'MODBUS', single or multiple generators can be connected to proprietary remote management and generator control systems.

Gas quality control system

- Mass Flow Controller – whatever happens downstream, the generator will continue to deliver the correct set pressure and flow, removing the risk of any over-flow or compromise in nitrogen purity.
- Integral Oxygen Analyser – constantly measures the oxygen content in the output gas stream, ensuring that it is within the set limits and the correct purity gas is delivered.
- Off-Gas-By-Pass – ensures that the correct gas purity is always delivered to the application, by automatically allowing out-of-specification gas to vent to the atmosphere during start up, or in the unusual event of a fault.
- Inlet and outlet pressure regulation – guarantees the correct compressed air-inlet and nitrogen gas-outlet pressures, ensuring maximum operating efficiency and safeguarding both equipment and product from potential damage or spoilage.
- Purpose designed electronic control system – ensures the correct quality, pressure and flow of nitrogen, through 100% control of all critical generator functions, including economy control, monitoring outputs and alarms.



Integral Oxygen Analyser –
Constant monitoring ensuring
the correct gas purity.

Nitrogen Generators GDN2 Series

Technical Data

Performance data is based on 7 bar g (100 psi g) air inlet pressure and 20 - 25°C (66 - 77°F) ambient temperature. Consult Gardner Denver for performance under other specific conditions.



Model	Nitrogen flow rates m³/hr vs Purity (oxygen content)											
	unit	10ppm	100ppm	250ppm	500ppm	0.10%	0.50%	1.00%	2.00%	3.00%	4.00%	5.00%
GDN20033	m³/hr	0.55	1.2	1.5	1.9	2.4	3.4	4.3	5.8	7.2	8.4	9.4
	cfm	0.3	0.7	0.9	1.1	1.4	2	2.5	3.5	4.2	4.9	5.5
GDN20072	m³/hr	1.2	2.4	3.2	3.9	4.7	6.9	8.5	11.6	14.3	16.7	18.8
	cfm	0.7	1.4	1.9	2.3	2.8	4.1	5	6.8	8.4	9.8	11.1
GDN20090	m³/hr	1.5	3.2	4.2	5.3	6.5	9.5	11.5	15.2	18.7	21.7	24.5
	cfm	0.9	1.9	2.5	3.1	3.8	5.6	6.8	8.9	11	12.8	14.4
Outlet pressure	bar g	5.6	5.4	5.9	5.7	5.6	5.7	6	6	5.8	5.7	5.6
	psi g	81	78	86	83	81	83	87	87	84	83	81

m³ reference standard = 20°C, 1013 millibar(a), 0% relative water vapour pressure.

Inlet Parameters

Inlet Air Quality	ISO 8573-1: 2010 Class 2.2.2 (2.2.1 with high oil vapour content)
Inlet Air Pressure Range	6 - 13 bar g 87 - 188 psi g

Environmental Parameters

Ambient Temperature	5° - 50°C 41° - 122°F
Humidity	50% @ 40°C (80% MAX ≤ 31°C)
IP Rating	IP20 / NEMA 1
Pollution Degree	2
Altitude	Altitude <2000m (6562ft)
Noise <80 dB (A)	<80 dB (A)

Electrical Parameters

Supply Voltage	115 / 230 3 10% V ac 50/60Hz
Power	80 W
Fuse	3.15A (Anti surge (T), 250v, 5 x 20mm HBC, Breaking Capacity 1500A @ 250v, UL Listed

Port Connections

Air Inlet	G $\frac{1}{2}$ "
GDN2 Outlet to Buffer	G $\frac{1}{2}$ "
GDN2 Inlet from Buffer	G $\frac{1}{2}$ "
GDN2 Outlet	G $\frac{1}{2}$ "

Weights and Dimensions

Model	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
GDN20033	1034	450	471	98
GDN20072			640	145
GDN20090			809	196

Packed Weights and Dimensions

Model	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
GDN20033	612	1490	950	174
GDN20072				221
GDN20090				272



Performance data is based on 7 bar g air inlet pressure and 20°C - 25°C ambient temperature.
Consult Gardner Denver for performance under specific conditions.

Model	Nitrogen flow rates m ³ /hr vs Purity (oxygen content)													
	5ppm	10ppm	50ppm	100ppm	250ppm	500ppm	0.10%	0.40%	0.50%	1%	2%	3%	4%	5%
GDN2-20P	3.5	4.5	6.7	8.0	9.7	11.1	12.4	16.7	17.7	21.3	25.3	29.8	30.9	33.7
GDN2-25P	5.3	6.8	10.1	12.0	14.6	16.7	18.6	25.1	26.6	32.0	38.0	44.7	46.4	50.6
GDN2-35P	7.0	9.0	13.4	16.0	19.4	22.2	24.8	33.4	35.4	42.6	50.6	59.6	61.8	67.4
GDN2-45P	8.8	11.3	16.8	20.0	24.3	27.8	31.0	41.8	44.3	53.3	63.3	74.5	77.3	84.3
GDN2-55P	10.5	13.5	20.1	24.0	29.1	33.3	37.2	50.1	53.1	63.9	75.9	89.4	92.7	101.1
GDN2-60P	11.6	15.0	22.3	26.6	2.3	36.9	41.2	55.5	58.9	70.8	84.1	99.1	102.7	112.1
GDN2-65P	13.3	17.1	25.5	30.4	36.9	42.2	47.1	63.5	67.3	80.9	96.1	113.2	117.4	128.1
GDN2-75P	14.5	18.6	27.7	33.1	40.2	46.0	51.3	69.1	73.3	88.2	104.7	123.4	127.9	139.5
GDN2-80P	16.1	20.7	30.8	36.8	44.6	51.1	57.0	76.8	81.4	98.0	116.4	137.1	142.1	155.0

m³ reference standard 20°C, 1013 millibar(a), 0% relative water vapour pressure.

Inlet Parameters

Inlet Air Quality	ISO 8573-1: 2010 Class 2.2.2 (2.2.1 with high oil vapour content)
Inlet Air Pressure Range	5-13 bar g

Environmental Parameters

Ambient Temperature	5-50°C
Humidity	50% @ 40°C (80% @ MAX @ 31°C)
IP Rating	IP20 / NEMA 1
Pollution Degree	2
Installation Category	II
Altitude	< 2000 m
Noise <80 dB (A)	<80 dB (A)

Electrical Parameters

Generator Supply	100 - 240 +/- 10% Vac 50/60Hz
Power Range	55 W
Fuse	3.15 A (Anti Surge (T), 250v, 5 x 20mm HBC, Breaking Capacity 1500A @ 250v, IEC 60127, UL R/C Fuse)

Port Connections

Air Inlet	G1
GDN2 Outlet to Buffer	G1
GDN2 Inlet from Buffer	G1
GDN2 Outlet	G1

Weights and Dimensions

Model	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
GDN2-20P	1894	550	881	299
GDN2-25P			1050	384
GDN2-35P			1219	469
GDN2-45P			1388	553
GDN2-55P			1557	638
GDN2-60P			1726	722
GDN2-65P			1895	807
GDN2-75P			2064	892
GDN2-80P			2233	976

Packed Weights and Dimensions

Model	Height	Width	Depth	Weight
	(mm)	(mm)	(mm)	(kg)
GDN2-20P	729	2000	1090	398.4
GDN2-25P			1260	495.4
GDN2-35P			1430	580.4
GDN2-45P			1600	686.4
GDN2-55P	832		1770	782.4
GDN2-60P			1935	897.4
GDN2-65P			2100	997.4
GDN2-75P			2275	1093.4
GDN2-80P		2445	1186.4	

Global Expertise

The GD rotary screw compressor range from 2.2 – 500 kW, available in both variable and fixed speed compression technologies, are designed to meet the highest requirements which the modern work environment and machine operators place on them.



The oil-free EnviroAire range from 15 – 160 kW provides high quality and energy efficient compressed air for use in a wide range of applications. The totally oil-free design eliminates the issue of contaminated air, reducing the risk and associated cost of product spoilage and rework.



A modern production system and process demands increasing levels of air quality. Our complete **Air Treatment Range** ensures the highest product quality and efficient operation.



Compressor systems are typically comprised of multiple compressors delivering air to a common header. The combined capacity of these machines is generally greater than the maximum site demand. To ensure the system is operated to the highest levels of efficiency, the **GD Connect** air management system is essential.



gdcompressors.eu@gardnerdenver.com
www.gardnerdenverproducts.com

For additional information please contact
 Gardner Denver or your local representative.

Specifications subject to change without notice.